



FLOW-PRO®

MELT BLOWN FILTER CARTRIDGES

Flow-Pro® Polypropylene Melt Blown Cartridges

Exceptional value with depth filtration is required.



Features & benefits

- Low cost
- Excellent chemical resistance
- Food grade ingredients
- No leachables
- High dirt holding capacity
- Wide range of lengths and micron ratings




Typical applications

- Potable water
- Beverages
- Pre-filtration for reverse osmosis equipment
- Fine chemicals
- Electronics
- Plating solutions and more!

Specifications

Material	Melt blown polypropylene
Maximum temperature	140° F / 60° C
Maximum pressure	40 PSID
Recommended change out	30 PSID
Maximum flow rate	2-8 GPM (based on micron rating)
Cartridge packaging	Individually shrink wrapped for purity
Types	Standard, Full-Flow and grooved
Micron ratings	1, 5, 20 and 50

Pressure drop

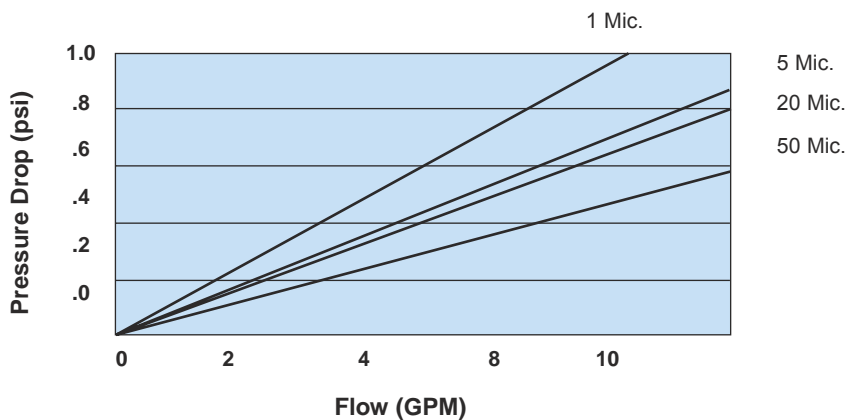

Flow-Pro® Melt Blown Cartridges



ANSI / NSF
STANDARD 42
COMPONENT
CERTIFIED

Standard diameter (2-1/2") 5"

Part Number	Length	OD	Micron	No. / case
FPMB1-5	5"	2-1/2"	1	48
FPMB5-5	5"	2-1/2"	5	48
FPMB20-5	5"	2-1/2"	20	48
FPMB50-5	5"	2-1/2"	50	48

9-7/8"

FPMB1-978	9-7/8"	2-1/2"	1	48
FPMB5-978	9-7/8"	2-1/2"	5	48
FPMB10-975	9-7/8"	2-1/2"	10	48
FPMB20-978	9-7/8"	2-1/2"	20	48
FPMB25-978	9-7/8"	2-1/2"	25	48
FPMB50-978	9-7/8"	2-1/2"	50	48

20"

FPMB1-20	20"	2-1/2"	1	24
FPMB5-20	20"	2-1/2"	5	24
FPMB20-20	20"	2-1/2"	20	24
FPMB50-20	20"	2-1/2"	50	24

29-1/4"

FPMB5-2925	29-1/4"	2-1/2"	5	24
------------	---------	--------	---	----

30"

FPMB1-30	30"	2-1/2"	1	24
FPMB5-30	30"	2-1/2"	5	24
FPMB20-30	30"	2-1/2"	20	24
FPMB50-30	30"	2-1/2"	50	24

40"

FPMB1-40	40"	2-1/2"	1	24
FPMB5-40	40"	2-1/2"	5	24
FPMB20-40	40"	2-1/2"	20	24
FPMB50-40	40"	2-1/2"	50	2